Outdoor/Indoor Rental LED Display

InnoLux Series

Built for the Stage. Engineered to Last.



CORE SYSTEM ADVANTAGES

72mm Ultra-Thin
Saves 20% on transportation costs compared to standard LED displays.

Daylight-Visible Brightness
≥4500 nits brightness for clear visibility under direct sunlight.

Smooth for Cameras
7680Hz high refresh rate for ultra-smooth, flicker-free visuals.

Universal Modules
Full-position interchangeability reduces inventory costs.

Ultra-Strong Structure
Supports large-scale installations with no cabinet deformation.




Seamless Splicing
CNC high-precision edges for a perfect gapless canvas.

TECHNICAL SPECIFICATIONS




PARAMETER	SPECIFICATIONS & PERFORMANCE DATA
Pixel Pitch	P2.604 /P2.97 / P3.91 / P4.8
Cabinet Specifications	500mm × 500mm × 72mm / 500mm × 1000mm × 72mm standard
Module Size:	500*125mm universal module
IP Rating	Indoor: IP30 / Outdoor: IP65
Maximum Power Consumption:	560W
Maintenance Method:	Magnetic front maintenance + integrated pluggable power supply
Cross-batch Consistency:	Module batch backup + factory calibration

PROVEN ARCHITECTURAL DEPLOYMENTS

01 USA concert,outdoor,P3.91,200m²

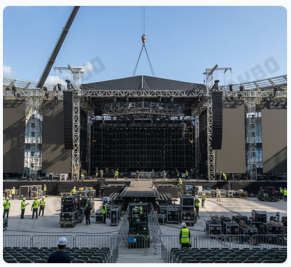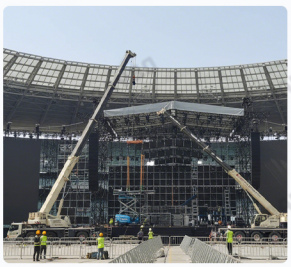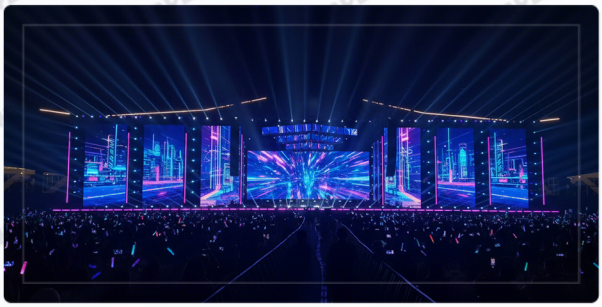02 Australian swimming pool,outdoor,P3.91,72m²





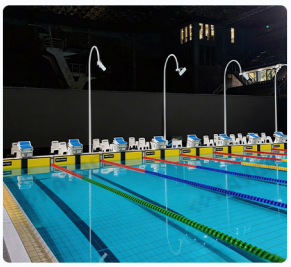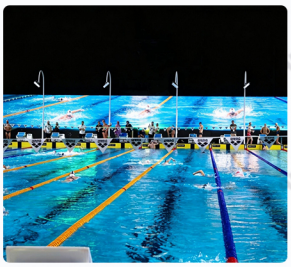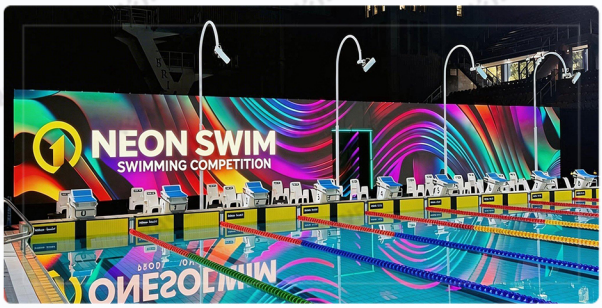

03 Mexican church interior, P3.91,32.8 x 9.8 ft






04 Spanish fitness competition,outdoor P3.91,50m²


05 Spanish lecture event,outdoor,P3.91,40m²






ABOUT RAYBO



R&D and Manufacturing Center
ShenZhen RAYBO



Global Service Center
ZhengZhou Headquarters

18+	5	130+	8,000+
Years Experience	Years Warranty	Export Countries	Global Cases

YOUR LED PARTNER: FOCUS. EFFICIENCY. RELIABILITY



Instant Expert Access



Tailored-to-Fit Solutions



Free CAD & 3D Rendering




3-Day Fast-Track Dispatch



72-Hour Reliability Validation




Seamless Global
Door-to-Door



Certified
Local Installation



Dedicated
Technical Partnership



5-Year Comprehensive
Protection Plan



Proactive Annual Check-ups

INTERNATIONAL COMPLIANCE & ACCREDITATION

Our production facilities align completely with rigorous international trade standards, delivering global compatibility and guaranteed component level durability.



CE



LVD



FCC




ISO 9001




RoHS



UL



CB



KC



CQC



TUV



SKA Leading Supplier