Double-fold LED Display

PixelFold Pro Series

Easy to Move. Ready to Display.



CORE SYSTEM ADVANTAGES

Portable Mobility
360° smooth movement

Quick Deployment
All-in-one folding design

Plug & Play
Ready in just 30 seconds

Aerospace Frame
Lightweight yet durable

Seamless Large Screen
Flawless panel-to-panel splicing enables unlimited massive displays.

GOB Triple Protection
IP65 water, dust & impact resistant

TECHNICAL SPECIFICATIONS

PARAMETER	SPECIFICATIONS & PERFORMANCE DATA
Pixel Pitch	P1.25 / P1.86 / P2 / P2.5
Cabinet Specifications	640mm × 1920mm standard
Module Size:	320 x 160mm universal module
IP Rating	Indoor: IP30 / IP65(GOB)
Material:	Aluminum
Maintenance Method:	Magnetic Front maintenance
Cross-batch Consistency:	Module batch backup + factory calibration

PROVEN ARCHITECTURAL DEPLOYMENTS

01 USA exhibition,indoor,P2







02 UK meeting,indoor,P2.5









03 French Pavilion, indoor, P2



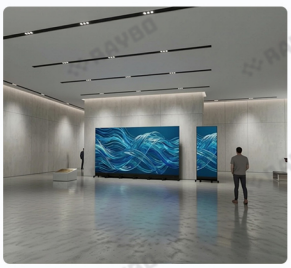

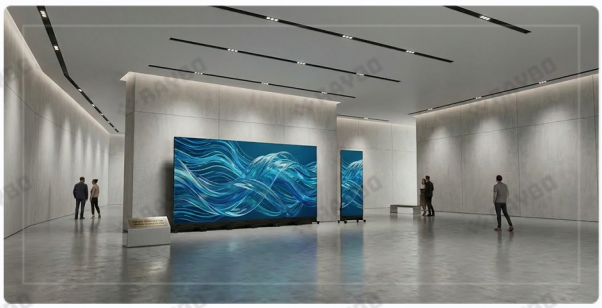


04 Italian cafes,indoor,P2







05 USA Clothing brand stores,indoor,P2.5

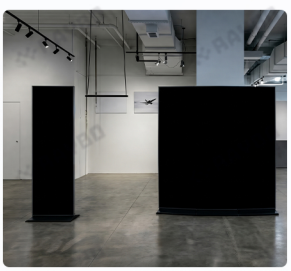





ABOUT RAYBO



R&D and Manufacturing Center
ShenZhen RAYBO



Global Service Center
ZhengZhou Headquarters

18+	5	130+	8,000+
Years Experience	Years Warranty	Export Countries	Global Cases

YOUR LED PARTNER: FOCUS. EFFICIENCY. RELIABILITY



Instant Expert Access



Tailored-to-Fit Solutions



Free CAD & 3D Rendering




3-Day Fast-Track Dispatch



72-Hour Reliability Validation




Seamless Global
Door-to-Door



Certified
Local Installation



Dedicated
Technical Partnership



5-Year Comprehensive
Protection Plan



Proactive Annual Check-ups

INTERNATIONAL COMPLIANCE & ACCREDITATION

Our production facilities align completely with rigorous international trade standards, delivering global compatibility and guaranteed component level durability.



CE



LVD



FCC




ISO 9001




RoHS



UL

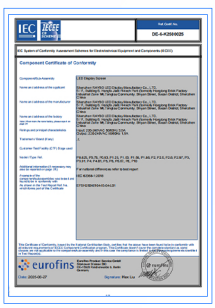

CB

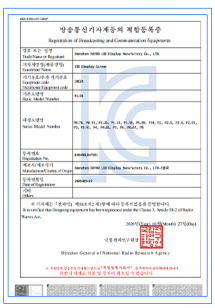

KC



CQC



TUV



SKA Leading Supplier